

*Enabling
Our
Customers'
Success*

Craig Wire Products
1055 Shadix Industrial Way
Douglasville, GA 30134
770-920-2222



COPPER MAGNET WIRE Product Data Sheet



CW 200 Class 200°C Copper

NEMA MW 36-C

DESCRIPTION

CW 200 magnet wire is a dual film insulation system consisting of a modified polyester basecoat and a polyamideimide (AI) topcoat for continuous operation at 200°C. This combination results in an insulation system that provides excellent abrasion resistance, in addition to outstanding chemical and solvent resistance for most common solvents and refrigerants.

APPLICATIONS


- AC Motors
- Generators
- DC Motors
- Hermetic Motors
- Dry Type Transformers

FEATURES & BENEFITS

- Excellent dielectric properties
- 200°C continuous operating temperature
- Resilient abrasion resistant surface
- Superior chemical & moisture resistance
- Resistant to most common solvents & refrigerants
- Superb windability

AVAILABILITY

CW 200 is available in heavy and quad builds on copper conductors.

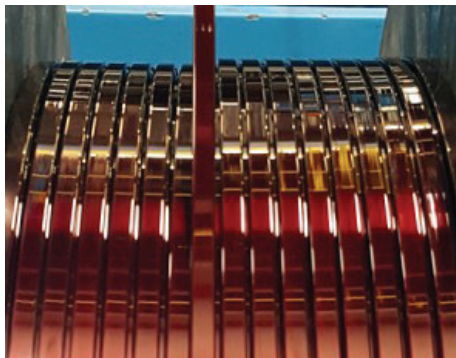

Please consult the Craig Wire service team for more detailed information.

770-920-2222 or go to
www.craigwire.com

CWP Product Data Sheet

PDS Rev#0919